




## SMOOTH AND MATTE PU MATERIAL THAT PROVIDES OPTIMAL OPACITY

There is no back-adhesive carrier which makes it perfect for large designs, numbers and letters as the film is so easy to weed. Low cost - very easy to process (no need for capitalizing).

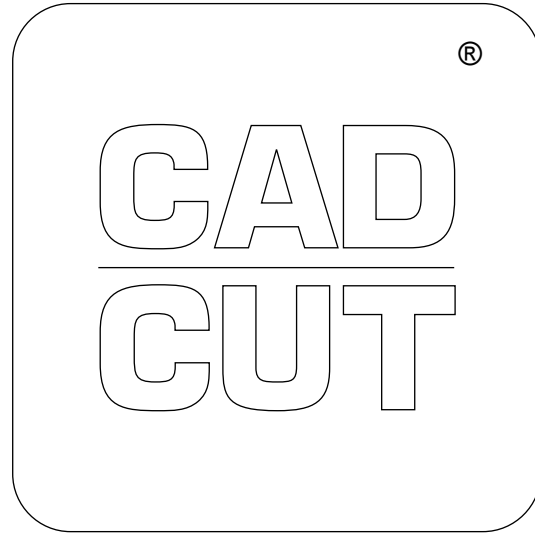

## AVAILABLE IN

50 cm x 25 m rolls

## RECOMMENDED FABRICS

- 100% Cotton
- 100% Polyester\*
- Polyester-Cotton blends

\* Test before application!

## CUTTING NOTES

You should always test cut prior to any production run. Remember cutter settings will need to be adjusted as the blade ages. For optimal cutting and weeding, maintain a line thickness of at least 1.5 mm for lettering and logos.

## APPLICATION INSTRUCTIONS

- Temperature: 160° C
- Time: 10 sec.
- Pressure: Medium (#4-6 on Hotronix®)
- Peel: Cold

## MULTI-COLOR DESIGNS

Apply background for 3-5 seconds, peel carrier cold. Repeat for additional colors. Finish with final application of 18-20 seconds. Peel cold.

## ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder. LED Pin or Tweezers

## CARE INSTRUCTIONS

Machine wash up to 60° C using mild detergent. Do not use bleach. Do not dry clean. Iron inside out only.

## STORAGE

Store in cool, dry area. Avoid direct heat, sunlight and humidity.


## DETAILS




## KEY

Easy weed	Thin
Ironable	Sticky carrier
Ironable only inside out	Multi-color application
Washable	Peel hot
Sublimation	Application
Stretchable	Pressure
Flock	

# CAD-CUT® BASIC FILM



**001**  
white



**110**  
yellow  
ca. Pant. 012c



**200**  
red  
ca. Pant. 186c




**300**  
royal blue  
ca. Pant. 286c




**350**  
navy  
ca. Pant. 532c



**400**  
green  
ca. Pant. 7727c



**700**  
black



**815**  
silver  
ca. Pant. 877c



**115**  
gold  
ca. Pant. 871c